



78K0R/Kx3 Microcontroller

Sample Program

Operation Manual

**(External Event Counter (Timer Array Unit),
ASM Source)**

This software is for reference only and NEC Electronics does not guarantee its operation.
Thoroughly evaluate this software on your set prior to use.

ZUD-CC-07-0073-E
January, 2008

1st Product Solution Group, Multipurpose Microcomputer Systems Division,
Microcomputer Operations Unit
NEC Electronics Corporation

- **The information in this document is current as of January, 2008. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.**

- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".

The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

"Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.

"Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).

"Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

- (1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).

CONTENTS

1. OVERVIEW.....4

2. RESOURCES USED5

3. SOFTWARE CONFIGURATION.....6

4. FUNCTION EXPLANATIONS7


5. FLOWCHARTS.....9

1. OVERVIEW

This manual explains the sample program functions of the external event counter for the 78K0R/Kx3.

In this sample program, the rising edge of P17 is detected by using timer channel 2. The main clock whose frequency is $1/2^5$ is used as the count clock. The valid number of times of counting the edge is 10, and INTTM02 is output at the 10th count. When INTTM02 is output, output pin P16 performs a toggle output.

This sample program uses the rising edge of P17 as an external event and toggles the output of P16 when INTTM02 is output.

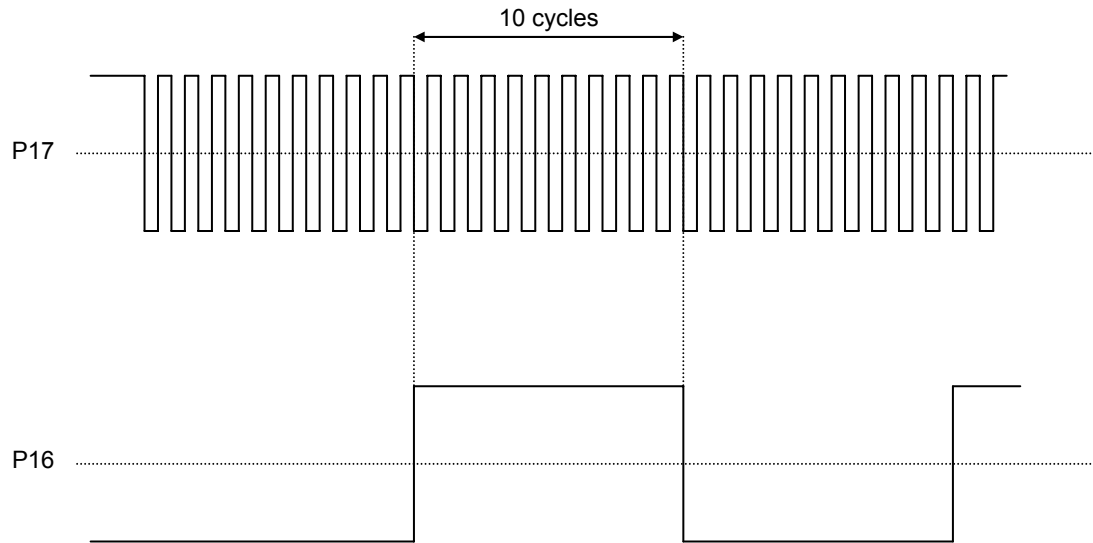

2. RESOURCES USED

Resource	Description	Remark
Main clock specification	Internal high-speed oscillator used (8 MHz (TYP.))	Supplied to CPU and peripheral hardware
	High-speed system clock used (20 MHz)	Oscillated by initial processing
Subclock	XT1 (32.768 kHz)	Oscillated by initial processing
Related hardware	Peripheral enable register 0 (PER0)	Controls the input clock of the timer array unit.
	Timer clock select register 0 (TPS0)	Operation clock: CK01 ($1/2^5$), 0.25 MHz (4.0 μ s)
	Timer mode register 02 (TMR02)	Operation clock: CK01, 8 MHz (0.125 μ s)
	Timer data register 02 (TDR02)	Valid edge detection counts: 10 counts
	Timer output mode register 0 (TOM0)	Channel 2 toggle operation mode
	Timer output level register 0 (TOL0)	Channel 2 positive logic output (active high)
	Timer output register 0 (TO0)	Channel 2 timer output value is "0".
	Timer channel start register 0 (TS0)	
	Timer channel stop register 0 (TTO)	
	Port mode register (PM1)	
	Port register (P1)	
I/O	Input: P17 Output: P16	
Interrupt	Timer interrupt	
Others	Not used	

3. SOFTWARE CONFIGURATION

Files

File Name	Processing Outline
K0R_vct.asm	Vector processing
K0R_init.asm	Initialization processing
K0R_main.asm	Main processing
K0R_sfr_set.asm	External event counter

4. FUNCTION EXPLANATIONS

[File name]

K0R_main.asm

Function

Function Name	Processing Outline	Argument	Return Value
MMA_STRT	Main routine	None	None

Function explanations

Function name	MMA_STRT
Processing	Main routine
Argument	–
Return value	–
Description	<p>Sets P16 to the output mode.</p> <p>Executes initialization processing and then starts external event counter measurement.</p> <p>P16's status is reversed when the interrupt request flag of timer channel 02 is set to ON. Then the interrupt request flag is cleared.</p>
Remark	–.

[File name]

K0R_sfr_set.asm

Functions

Function Name	Processing Outline	Argument	Return Value
STM_EINI	Initializes external event counter.	None	None
STM_ESTT	Starts external event counter operation.	None	None
STM_ESTP	Stops external event counter operation.	None	None

Function explanations

Function name	STM_EINI
Processing	Initializes external event counter.
Argument	–
Return value	–
Description	<p>Initializes the timer array unit.</p> <ul style="list-style-type: none"> • Supplies a timer array unit input clock. • Sets the clock frequency to 4 μs. <p>Initializes timer channel 2.</p> <ul style="list-style-type: none"> • Operation mode: Operation clock CK01, selection of the valid edge of the TI02 pin input, rising edge detection, event counter mode • Output mode: Toggle operation mode • Sets the valid edge detection count to 10.
Remark	This function is called after reset.

Function name	STM_ESTT
Processing	Starts external event counter operation.
Argument	–
Return value	–
Description	Starts timer channel 2 operation.
Remark	–

Function name	STM_ESTP
Processing	Stops external event counter operation.
Argument	–
Return value	–
Description	Stops timer channel 2 operation.
Remark	–

5. FLOWCHARTS

